





Testing MSR on Verifone Engage Series


1. Power on device
2. Press the 1,5, and 9 buttons all down simultaneously to boot into the Estate Management Menu seen below

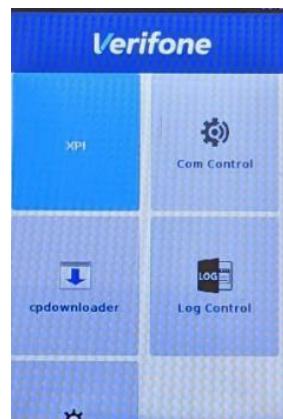

3. Press 1,5, and 9 simultaneously again to boot into the Verix Terminal Manager Menu 4. From here you will see four options. Please select "Supervisor"

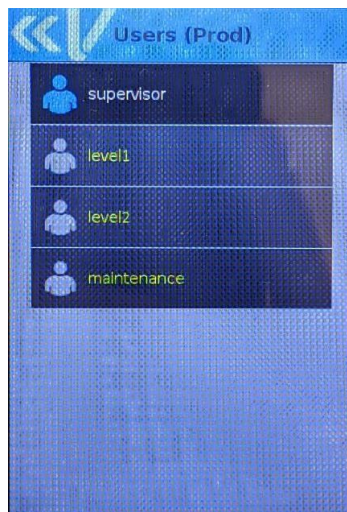

5. The device will now prompt you for a password, please enter 1668321 and then the green enter button to enter the Supervisor Menu.
6. From here you will want to follow the path below...
 - a. Diagnostics>Card>Magnetic Reader
7. Now you will go ahead and swipe your card.
8. If your screen matches the image below, your MSR hardware is working.

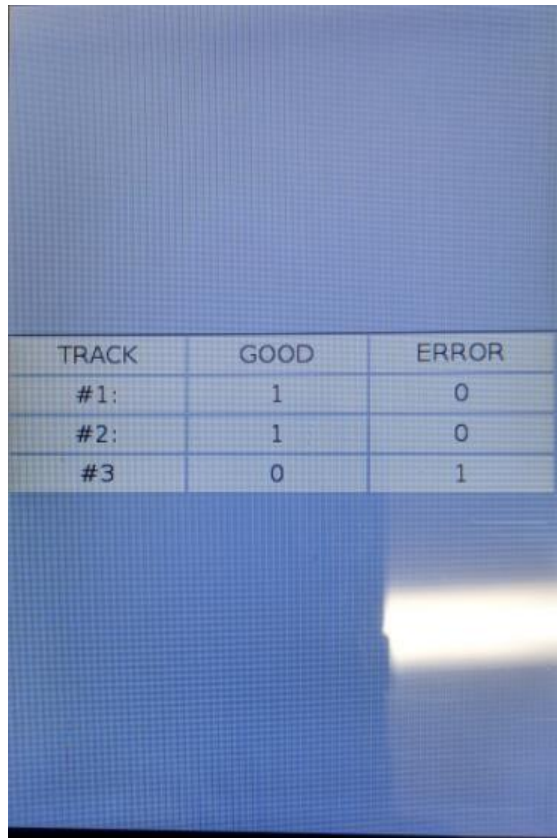

TRACK	GOOD	ERROR
#1:	1	0
#2:	1	0
#3	0	1

9. If your device gets different results than the above image, please contact NewBold